



CATALOGO GENERALE

YOUR LIGHTS OUR POWER...YOUR SAFETY OUR WARRANTY

6 CHI SIAMO

8 MISSIONE

10 ILLUMINAZIONI E DECORAZIONI LED

15 VIDEOSORVEGLIANZA

25 WALL MONITOR

35 NUOVI PRODOTTI

CHI SIAMO

Teco Trading è una moderna azienda di ultimissima generazione nata dall'incontro tra professionisti del settore interessati a mettere a disposizione del mercato le proprie conoscenze e competenze al fine di garantire prestazioni e servizi di primo livello.

Una fitta rete internazionale di contatti e partnership commerciali permettono a TecoTrading di offrire soluzioni e prodotti innovativi e di assoluta eccellenza.

Grazie a continui investimenti in ricerca e sviluppo di nuove tecnologie Teco Trading è in grado di realizzare proposte personalizzate che garantiscono standard qualitativi e quantitativi di primissimo livello, prestazioni di alto valore e prodotti dal forte valore aggiunto.

Soluzioni molteplici che vanno dall'illuminazione di interni e di esterni, alla sicurezza interna di ambienti pubblici e privati, all'utilizzo di nuove tecnologie non ancora presenti sul mercato.

Professionalità ed esperienza consentono inoltre di seguire il cliente in tutte le fasi del lavoro dalla progettazione tecnica e grafica, alla produzione, all'installazione, sino all'assistenza quotidiana.



MISSIONE

YOUR LIGHTS OUR
POWER
YOUR safety OUR
warranty

...è questo il nostro claim e la nostra filosofia.

Innovazione, eccellenza e professionalità le nostre qualità...
soddisfare le esigenze dei nostri cliente è la nostra missione...



ILLUMINAZIONI
E DECORAZIONI LED



TUB/39
T8 150cm Series

Dimension	L1500*Φ26mm
Voltage	AC 85-265V
Power	28W
Cover type	Transparent
Cct	5700-6100K
Cri	75
Angle	120°
Led type	3528
Led qty	288pcs
Lumens	2500lm



TUB/40
T8 150cm Series

Dimension	L1500*Φ26mm
Voltage	AC 85-265V
Power	28W
Cover type	Milk white
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	288pcs
Lumens	2200lm




TUB/41
T8 150cm Series

Dimension	L1500*Φ26mm
Voltage	AC 85-265V
Power	28W
Cover type	Milk white
Cct	4000-4500K
Cri	75
Angle	120°
Led type	3528
Led qty	288pcs
Lumens	2300lm



TUB/42
T8 150cm Series

Dimension	L1500*Φ26mm
Voltage	AC 85-265V
Power	28W
Cover type	Milk white
Cct	5700-6100K
Cri	75
Angle	120°
Led type	3528
Led qty	288pcs
Lumens	2300lm



TUB/43
T8 240cm Series

Dimension	L1500*Φ26mm
Voltage	AC 110-277V
Power	36W
Cover type	Transparent
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	384
Lumens	3200lm



TUB/44
T8 240cm Series

Dimension	L1500*Φ26mm
Voltage	AC 110-277V
Power	36W
Cover type	Transparent
Cct	4000-4500K
Cri	75
Angle	120°
Led type	3528
Led qty	384
Lumens	3400lm



TUB/45
T8 240cm Series

Dimension	L1500*Φ26mm
Voltage	AC 110-277V
Power	36W
Cover type	Transparent
Cct	5700-6100K
Cri	75
Angle	120°
Led type	3528
Led qty	384
Lumens	3400lm



TUB/46
T8 240cm Series

Dimension	L1500*Φ26mm
Voltage	AC 110-277V
Power	36W
Cover type	Milk white
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	384
Lumens	3100lm



TUB/25
T8 120cm Series

Dimension	L1200*Φ26mm
Voltage	AC 110-277V
Power	20W
Cover type	Transparent
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	216pcs
Lumens	1700lm



TUB/28
T8 120cm Series

Dimension	L1200*Φ26mm
Voltage	AC110-277V
Power	20W
Cover type	Milk white
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	216pcs
Lumens	1600lm




TUB/31
T8 120cm Series

Dimension	L1200*Φ26mm
Voltage	AC 85-265V
Power	25W
Cover type	Trasparent
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	252pcs
Lumens	2150lm



TUB/34
T8 120cm Series

Dimension	L1200*Φ26mm
Voltage	AC 85-265V
Power	25W
Cover type	Milk white
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	252pcs
Lumens	2100lm



TUB/10
T8 60cm Series

Dimension	L600*Φ26mm
Voltage	AC 110-277V
Power	9W
Cover type	Milk white
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	108pcs
Lumens	720lm



TUB/13
T8 60cm Series

Dimension	L600*Φ26mm
Voltage	AC 110-277V
Power	12W
Cover type	Transparent
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	120pcs
Lumens	1000lm



TUB/19
T8 120cm Series

Dimension	L1200*Φ26mm
Voltage	AC 110-277V
Power	18W
Cover type	Transparent
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	192pcs
Lumens	1600lm



TUB/16
T8 60cm Series

Dimension	L600*Φ26mm
Voltage	AC 110-277V
Power	12W
Cover type	Milk white
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	120pcs
Lumens	980lm



TUB/47
T8 240cm Series

Dimension	L1500*Φ26mm
Voltage	AC 110-277V
Power	36W
Cover type	Milk white
Cct	4000-4500K
Cri	75
Angle	120°
Led type	3528
Led qty	384
Lumens	3300lm




TUB/37
T8 150cm Series

Dimension	L1500*Φ26mm
Voltage	AC 85-265V
Power	28W
Cover type	Trasparent
Cct	2800-3200K
Cri	75
Angle	120°
Led type	3528
Led qty	288pcs
Lumens	2400lm




TUB/48
T8 240cm Series

Dimension	L1500*Φ26mm
Voltage	AC 110-277V
Power	36W
Cover type	Milk white
Cct	5700-6100K
Cri	75
Angle	120°
Led type	3528
Led qty	384
Lumens	3300lm




PAN/01
40W LED PANEL LIGHT

Dimension	600*600*45 mm
Power	40W
Lumen	3800lm
C/t	2700-3000K
Cri	80Ra
Angle	150°
Volt.	AC85-265V
Dimm.	NO




STR/37
SMD3528, 60 LED/M; DC 12V

Color RED
Ip rating Silica Tube Encased IP67
Power 4.8W
Pcb width 8/10mm
Lumen/m 90-130LM




STR/38
SMD3528, 60 LED/M; DC 12V

Color YELLOW
Ip rating Silica Tube Encased IP67
Power 4.8W
Pcb width 8/10mm
Lumen/m 90-130LM




STR/39
SMD3528, 60 LED/M; DC 12V

Color BLUE
Ip rating Silica Tube Encased IP67
Power 4.8W
Pcb width 8/10mm
Lumen/m 40-64LM




STR/40
SMD3528, 60 LED/M; DC 12V

Color GREEN
Ip rating Silica Tube Encased IP67
Power 4.8W
Pcb width 8/10mm
Lumen/m 130-180LM




STR/81
SMD3528, 240 LED/M; DC 12V

Color BLUE
Ip rating Silica Gel Covered IP65
Power 19.2W
Pcb width 12mm
Lumen/m 160-256LM




STR/82
SMD3528, 240 LED/M; DC 12V

Color GREEN
Ip rating Silica Gel Covered IP65
Power 19.2W
Pcb width 12mm
Lumen/m 520-720LM



STR/84
SMD3528, 60 LED/M; DC 12V

Color RGB
Ip rating Silica Gel Covered IP65
Power 19.2W
Pcb width 12mm
Lumen/m 1040-1200LM



STR/83
SMD3528, 240 LED/M; DC 12V

Color WHITE
Ip rating Silica Gel Covered IP65
Power 19.2W
Pcb width 12mm
Lumen/m 1200-1320LM



STR/96
SMD3528, 240 LED/M; DC 12V

Color
Ip rating

RGB
Silica Tube Encased
and Filled
with Silica Gel IP68
19.2W
12mm
1040-1200LM

Power
Pcb width
Lumen/m



STR/90
SMD3528, 240 LED/M; DC 12V

Color
Ip rating

RGB
Silica Tube Encased IP67
19.2W
12mm
1040-1200LM

Power
Pcb width
Lumen/m




STR/95
SMD3528, 240 LED/M; DC 12V

Color
Ip rating

WHITE
Silica Tube Encased and
Filled with Silica Gel IP68

Power
Pcb width
Lumen/m

19.2W
12mm
1200-1320LM



STR/89
SMD3528, 240 LED/M; DC 12V

Color
Ip rating

WHITE
Silica Tube Encased IP67


Power
Pcb width
Lumen/m

19.2W
12mm
1040-1200LM




CT_BT-5050FX60-24RGB
SMD5050, 120LED/M; DC 12V

Color RGB
Ip rating Non-waterproof
Power 28.8W
Pcb width 18mm
Lumen/m 1600-1720LM




CT_BT-5050FX60-24W
SMD5050, 120LED/M; DC 12V

Color WHITE
Ip rating Non-waterproof
Power 28.8W
Pcb width 12mm
Lumen/m 1800-1920LM



CT_BT-5050FXWP30J-12RGB
SMD5050, 60LED/M; DC 12V

Color RGB
Ip rating Silica Tube Encased and Filled with Silica Gel IP68
Power 14.4W
Pcb width 10mm
Lumen/m 800-860LM



CT_BT-5050FXWP30J-12W
SMD5050, 60LED/M; DC 12V

Color WHITE
Ip rating Silica Tube Encased and Filled with Silica Gel IP68
Power 14.4W
Pcb width 10mm
Lumen/m 900-960LM




CT_BT-5050FXWP30-12RGB
SMD5050, 60LED/M; DC 12V

Color	RGB
Ip rating	Silica Tube Encased IP67
Power	14.4W
Pcb width	10mm
Lumen/m	800-860LM



CT_BT-5050FXWP30-12W
SMD5050, 60LED/M; DC 12V

Color	WHITE
Ip rating	Silica Tube Encased IP67
Power	14.4W
Pcb width	10mm
Lumen/m	900-960LM



CT_BT-5050FX30J-12RGB
SMD5050, 60LED/M; DC 12V

Color	RGB
Ip rating	Silica Gel Covered IP65
Power	14.4W
Pcb width	10mm
Lumen/m	800-860LM



CT_BT-5050FX30J-12WW
SMD5050, 60LED/M; DC 12V

Color	WHITE
Ip rating	Silica Gel Covered IP65
Power	14.4W
Pcb width	10mm
Lumen/m	900-960LM



SPOT/29
4.5W SPOTLIGHT WITH 430lm

Dimension	Φ50*52mm
Power	5W
Lumen	400lm
C/t	2700-3000K
Cri	80Ra
Angle	30°/60°
Volt.	AC/DC 12V
Base	MR16/GU10/E27
Dimm.	NO



SPOT/21
3.6W SPOTLIGHT WITH 500lm

Dimension	Φ50*52mm
Power	6W
Lumen	480lm
C/t	2700-3000K
Cri	80Ra
Angle	30°/60°
Volt.	AC/DC12V
Base	MR16/GU10/E27
Dimm.	NO



SPOT/25
4.5W SPOTLIGHT WITH 430lm

Dimension	Φ50*57mm
Power	5W
Lumen	430lm
C/t	2700-3000K
Cri	80Ra
Angle	30°/60°
Volt.	AC230V
Base	MR16/GU10/E27
Dimm.	NO



SPOT/17
3.6W SPOTLIGHT WITH 500lm

Dimension	Φ50*57mm
Power	6W
Lumen	500lm
C/t	2700-3000K
Cri	80Ra
Angle	30°/60°
Volt.	AC230V
Base	MR16/GU10/E27
Dimm.	NO

SPOTLIGHT



**COB/56
5W CANDLE BULB**

Dimension	Φ37*110mm
Power	5W
Cri	80Ra
Angle	300°
Volt.	AC220V
Base	E14
Dimm.	YES



**COB/45
5W FLOWER BULB**

Dimension	Φ58*110mm
Power	5W
Lumen	400lm
C/t	2700-3000K
Cri	80Ra
Angle	300°
Volt.	AC220V
Base	E27
Dimm.	NO



**COB/51
5W CANDLE BULB**

Dimension	Φ37*110mm
Power	5W
Lumen	400lm
C/t	2700-3000K
Cri	80Ra
Angle	300°
Volt.	AC220V
Base	E14
Dimm.	NO



**COB/41
12W CORN LAMP**

Dimension	Φ50*120mm
Power	12W
Lumen	1200lm
C/t	2700-3000K
Cri	80Ra
Angle	360°
Volt.	AC 85-265V
Base	E27
Dimm.	NO

LIGHT BULB



SPOT/13
2.6W SPOTLIGHT WITH 550lm

Dimension	Φ50*52mm
Power	6W
Lumen	500lm
C/t	2700-3000K
Cri	80Ra
Angle	30°/60°
Volt.	AC/DC12V
Base	MR16/GU10/E27
Dimm.	NO



SPOT/05
1.7W SPOTLIGHT WITH 600lm

Dimension	Φ50*57mm
Power	7W
Lumen	550lm
C/t	2700-3000K
Cri	80Ra
Angle	15°/30°/60°
Volt.	AC/DC12V
Base	MR16/GU10/E27
Dimm.	NO



SPOT/01
1.7W SPOTLIGHT WITH 600lm

Dimension	Φ50*66mm
Power	7W
Lumen	600lm
C/t	2700-3000K
Cri	80Ra
Angle	15°/30°/60°
Volt.	AC230V
Base	MR16/GU10/E27
Dimm.	NO



**COB/29
9W DLS SERIES**

Dimension	Φ63*117mm
Power	9W
Lumen	800lm
C/t	2700-3000K
Cri	80Ra
Angle	150°
Volt.	AC85-265V
Base	E27
Dimm.	NO



**COB/21
7W DLS SERIES**

Dimension	Φ63*117mm
Power	7W
Lumen	600lm
C/t	2700-3000K
Cri	80Ra
Angle	150°
Volt.	AC 85-265V
Base	E27
Dimm.	NO



**COB/33
12W DLS SERIES**

Dimension	Φ63*125mm
Power	12W
Lumen	1000lm
C/t	2700-3000K
Cri	80Ra
Angle	150°
Volt.	AC85-265V
Base	E27
Dimm.	NO



**COB/25
9W R80 SERIES**

Dimension	Φ78*110mm
Power	9W
Lumen	800lm
C/t	2700-3000K
Cri	80Ra
Angle	150°
Volt.	AC 85-265V
Base	E27
Dimm.	NO



PAR/18 LED PARLIGHT

Dimension	Φ70*75mm
Power	7W
Led type	1 pc COB
Lumen	650lm
C/t	5800-6200K
Cri	80Ra
Angle	30°/60°
Volt.	AC220V
Base	MR16/GU10/E27
Dimm.	YES
Equivalent	60W=



PAR/12 LED PARLIGHT

Dimension	Φ95*133mm
Power	10W
Led type	1 pc COB
Lumen	900lm
C/t	5800-6200K
Cri	80Ra
Angle	30°/60°
Volt.	AC220V
Base	MR16/GU10/E27
Dimm.	YES
Equivalent	75W=



PAR/06 LED PARLIGHT

Dimension	Φ120*130mm
Power	16W
Led type	1 pc COB
Lumen	1300lm
C/t	5800-6200K
Cri	80Ra
Angle	30°/60°
Volt.	AC85-265V
Base	MR16/GU10/E27
Dimm.	YES
Equivalent	100W=

PARLIGHT

VIDEOSORVEGLIANZA



TEST/08 CCTV TESTER

Details
Li-Battery can support

3.5 inch LCD
12 hours 12. DC 12V



BDC/302 1/4 CMOS 600 TVL IR CUT

Details

24x5EA 20m
Color CCD/
Waterproof Vandal
Dome/24 PCS $\varnothing$ 5 IR
LEDs/20 meters IR
distance /3.6 mm
lens/Aluminum Hou
MTV-3.6mm 6mm 8mm

Lens option



DVR/17 16 CH D1 realtime Recording/16 CH Audio/ HDMI/ Support 4*SATA HDD & DVD-RW/2 U housing

Dimensions

430*70*360mm



BRA/140

1/3 SONY SUPER HAD II 650 TVL/OSD /256X SENSE UP/DWDR/3D-DNR/MOTION

Details

Vari-Focus
-1/3 SONY Super
HAD CCD /4 inch
New Design Dome/
3D bracket inside /
3.5~8 mm Manual
Iris lens/ DC12V

Lens option

3.5~8mm, 2.8~12mm manual iris lens

Color option

3.5~8mm, 2.8~12mm manual iris lens



BRA/168

1/3 SONY SUPER HAD II 420 TVL

Details

20x5EA 20m
Vandal-proof IR
Dome/1/3 SONY
Super HAD CCD/20
PCS ϕ 5 IR LEDs /20
meters IR distance/
4~9 mm Vari-Fo

Color option

WHITE/BLACK



BRA/64

1/3 SONY 960H LOW ILLUMINATION CCD/ 700 TVL EFFIO-E /DWDR, DNR/OSD

Details

42X5EA 20m
Waterproof IP66/1/3
SONY Super HAD
CCD/vari-focus lens
Externally adjust
Zoom/Focus on
bottom by han

Lens option

4~9mm, 2.8~12mm



BRA/59

1/3 SONY SUPER HAD II 600TVL/OSD/ NEXTCHIP 2040 DSP

Details

50 meter IR ARRAY
Waterproof IP66/2* Gen III IR Array/Color 0 Lux/8mm
Mega pixels IR lens /30 meters IR distance/cable
Waterproof IP66/2* Gen III IR Array/Color 0 Lux/8mm
Mega pixels IR lens /30 meters IR distance/cable
Waterproof IP66/2* Gen III IR Array/Color 0 Lux/8mm
Mega pixels IR lens /30 meters IR distance/cable

Lens option

Color option

WALL MONITOR



Kio/06

Screen size
Resolution

65inch
1920X1080



Kio/10

Screen size
Resolution


55inch
1920X1080



Kio/16

Screen size
Resolution

55inch
1920X1080

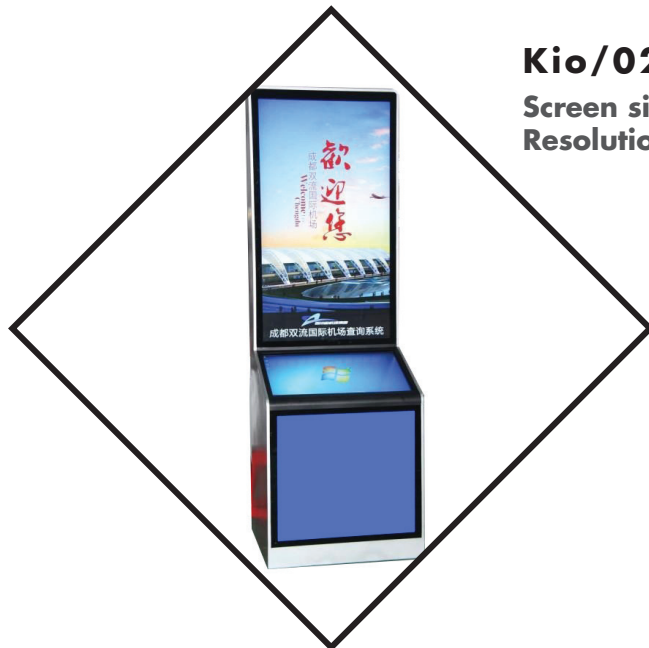

Kio/02

Screen size
Resolution

32inch
1920X1080



Kio/04

Screen size
Resolution

42inch
1920X1080



Kio/19

Screen size 55inch
Resolution 1920X1080



Kio/13

Screen size 55inch
Resolution 1920X1080

WALL MONITOR

NUOVI PRODOTTI



AS/05

Voltage 230V-/50Hz
Power 2300W
Current 10.5A
Blowing 31 m/s



AS/04

Rated power 2500W
Wind speed 30 m/s
Temperature of hot airflow 45-58 degrees
Protection degree IPX



AS/21

Volts 4.5VDC
Dimensions (mm) 110Wx275Hx106D
Capacity 800 cc
Weight 1.0kg unpacked ; 1.3kg packed
Warranty ONE-YEAR



AS/01

Voltage 230V-/50Hz
Power 2300W
Current 10.5A
Blowing 31m/s



AS/22

Volts
Dimensions
Capacity
Weight
Material
Warranty


4.5VDC
110 mm (W) x 275 mm (H) x 106 mm (D)
800 cc
1.0kg unpacked ; 1.3kg packed
Stainless Steel
ONE-YEAR



AS/23

Volts
Dimensions
Capacity
Weight
Warranty

4.5VDC
110 mm (W) x 270 mm (H) x 115 mm (D)
800 cc
0.7kg unpacked ; 1.0kg packed
ONE-YEAR



AS/25

Voltage
Power
Working Temperature
Spray volume per second
Induction distance
Dimensions (mm)
Net Weight
Gross Weight
Material

AC200-240V, 50/60Hz
Less than 25W
5-40 Degree
0.6-0.8ml/s
8-13cm
220(L)x185(W)x380(H)
.3kg;
4.0Kg;
Stainless steel



AS/09

Voltage
Dimensions (mm)
Air velocity
Air blowing
Estimated drying time

AC220-240 50/60Hz
 687Hx2200Wx300D
 85 m/s (low); 95 m/s (high)
 125 (m3/h)
 5-7 seconds



AS/10

Voltage
Dimensions (mm)
Air velocity
Air blowing
Rated power
Motor power
Power of heating element
Estimated drying time

AC220-240 50/60Hz
 670Hx330Wx219D
 100 m/s
 136 (m3/h)
 1000W-1300W
 450W-750W
 550W
 6 seconds



AS/11

Voltage
Dimensions (mm)
Air velocity
Air blowing
Rated power
Motor power
Power of heating element
Estimated drying time

AC220-240 50/60Hz
 670Hx300Wx219D
 100 m/s
 136 (m3/h)
 1000W-1300W
 450W-750W
 550W
 6 seconds



AS/18

Material
Power
Drying time
Blowing
Maximum airflow
Safety device

Terms of control
Dimension (mm)
Packing (mm)

Fireproof ABS;
 AC220V-240V 50Hz/60Hz;
 7-10seconds
 100m/s
 360km/h;
 overheating protection, over-current protection,
 short-circuit protection
 microcomputer control
 470H*250W*165D;
 540L*480W*630H



AS/16

Volts
Related Power
Dimensions (mm)
Current
Air speed
Maximum airflow
Inductive zone
Air temperature
Protection
Packing (mm)

AC110V/220V-240V (50Hz/60Hz)
 1450W
 293Wx163Dx320H
 6.5A (220V) / 12.7A (110V)
 100M/S
 320km/h
 50-120MM
 >54 degree
 Class II
 350*450*390cm/2pcs



www.tecotrading.com
info@tecotrading.com

CONTATTI